Engraved Faceplate

Spare Parts Leaflet 31-AAA147QY

March 8, 2006 / Page 1 of 5



To operate car Insert fire key and turn to "ON" Press desired floor button Press "CALL CANCEL" button


To cancel floor selection To close door

To open door

To hold car at floor

To return car to recall floor Press and hold "DOOR CLOSE" button Press and hold "DOOR OPEN" button With doors open, turn key to "HOLD"

With doors open, turn key to "OFF"

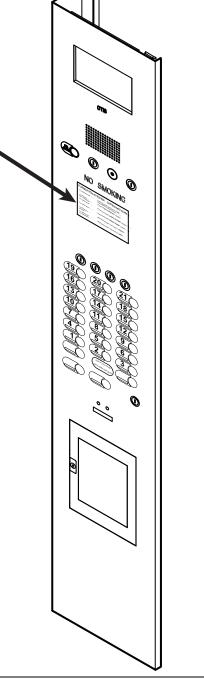



Safety First!

SERVICE ENGINEERING Otis Elevator Company Bloomfield, Connecticut USA

History

Leaflet Description

This leaflet lists the available engraved faceplates made from 16 ga. stainless steel and 14 ga. brass that is used on the Series 4 car operating panel.

Leaflet Revisions

Date Revised	Subject Matter Expert	Reason for Revision
March 8, 2006	Joseph Zych	New SPL

Related Drawings

Drawing No.	Title	Drawing No.	Title
AAA147QY	Engraved Faceplate		

Related Documents

Document ID	Title	
SPL 31-AAA25000BT	Series 4 Swing Return Car Operating Panel	

Subject Matter Expert

Name	Department
Joseph Zych	OSC Service Engineering

About Spare Parts Leaflets...


This document lists the lowest replaceable units (LRUs) for the standard version of the product. The LRUs are chosen by a team of Otis associates representing engineering and manufacturing.

While goal of this document is to make parts identification as easy as possible, the document cannot be all-inclusive. Elevator and escalator contracts classified as "special" or "custom" are not addressed here. For such contracts, please refer to specified information, the contract folder, TIPs, Field Education Articles, Construction Letters, etc. for further information.

If you have any suggestions about this document, please contact the subject matter expert listed on this page.


Page 2	March 8, 2006
_	•

Engraved Faceplate for ANSI A17.1 1996 Rule 211.7 (b)

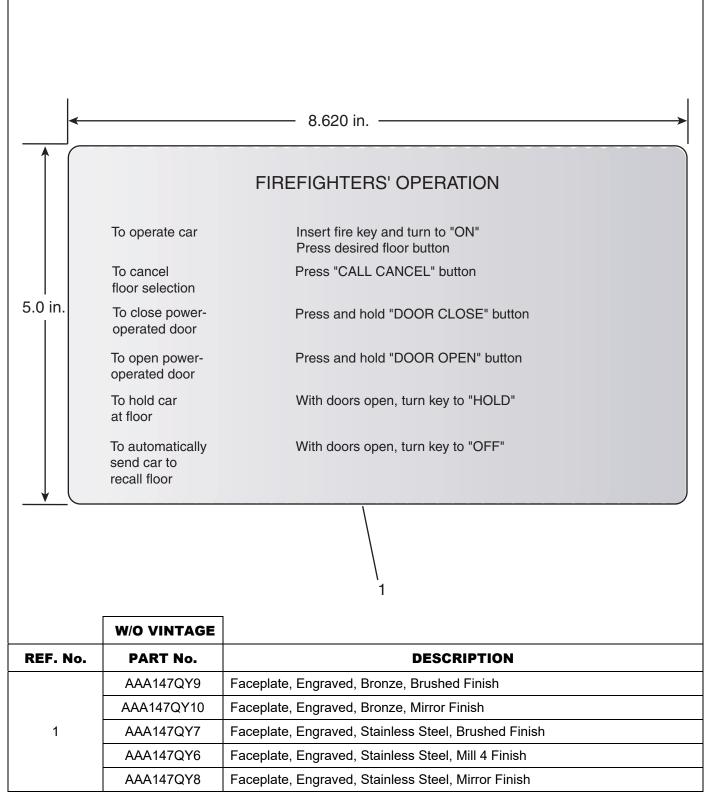


NOTE: Lettering is 0.188-in. high Helvetica medium condensed black.

Engraved Faceplate for ANSI A17.1 1998 Rule 211.7 (b)

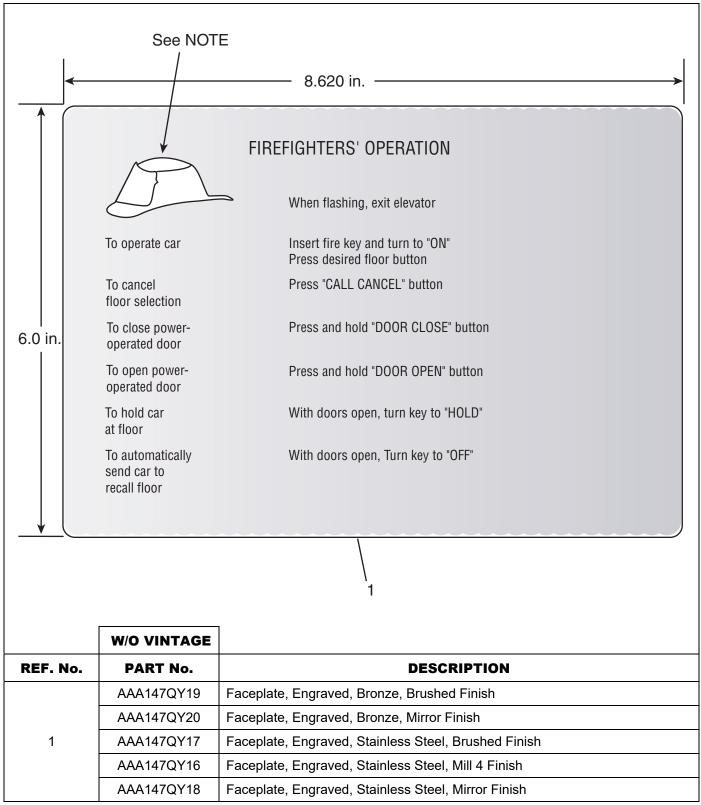

NOTE: Lettering is 0.188-in. high Helvetica medium condensed black. Firefighters' hat is black.

Engraved Faceplate for ASME A17.1/CAN B44 2000

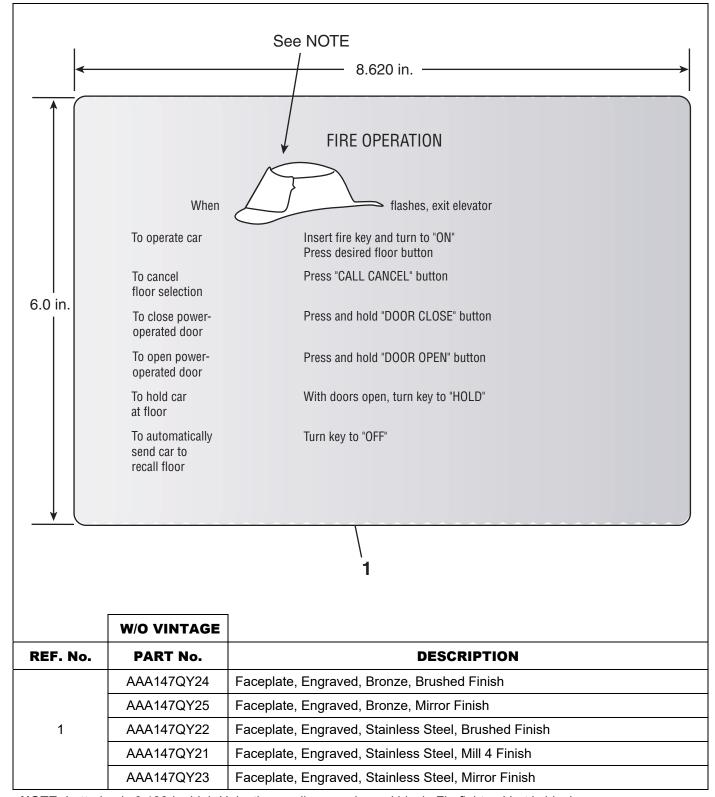

NOTE: Lettering is 0.188-in. high Helvetica medium condensed black. Firefighters' hat is black.